


TUB CU FLANSE FF

Short double flanged pipes FF

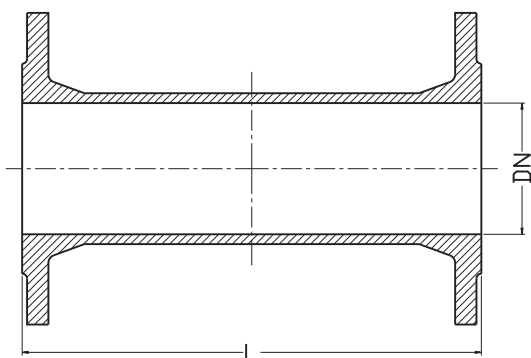

DN	L	Masa	DN	L	Masa
[mm]	[mm]	[kg]	[mm]	[mm]	[kg]
50	300	8,6	250	500	46
	500	9		1000	69
80	100	7,5	300	200	42
	200	9		300	48
	300	10		500	63
	400	12,5		1000	89
	500	13	400	500	87
	1000	22		1000	155
100	100	9	500	500	140
	200	12		1000	198
	300	13	600	500	180
	400	14		1000	250
	500	16	800	500	265
	1000	28		1000	412
150	100	15			
	200	17			
	300	19			
	400	20			
	500	24			
	1000	36			
200	100	20			
	200	23			
	300	27			
	400	30			
	500	33			
	1000	50			
250	200	32			
	300	36			

Date tehnice:

Flanse conform EN 1092-2: 1999
Presiune de lucru PN10,PN16
Executie conform EN 545: 2006.

Caracteristici constructive:

Corp-
Fonta ductila GJS 500-7 EN 1563:2000
Executie standard:
vopsea epoxidica RAL5005 250 μm (*).

Aviz sanitar emis de PZH

Domenii de utilizare:

In instalatii de apa, apa potabila si alte fluide inerte.

Montaj:

Montajul se poate face in orice pozitie.

* - alte executii la cerere

Technical data:

flanges acc. EN 1092-2
working pressure PN10,PN16
version acc. EN 545: 2006

Design features:

Body-
Nodular castiron GGG50 DIN 1693
Standard execution:
epoxide paint RAL5005 250 μm (*).

Hygienic attest by PZH

Application:

In instalations: for water, potable water and other inert fluids

Assembly:

Assembly from horizontal to vertical position.

*- other executions on request