


Stalp de manevra cu indicator de pozitie pentru actionare manuala
APA
CANALIZARE
GAZ


Dispozitiv de blocare


 Domenii de
utilizare:

Apa

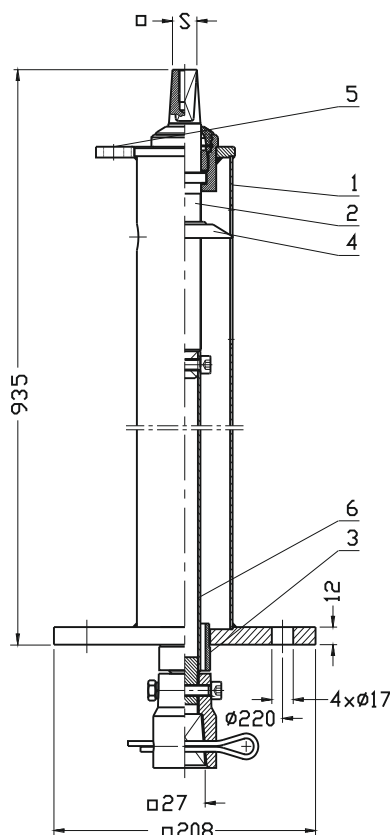

Stingere incendii



Gaz



Index	S	F	Nr. rotatii deschidere completa	Masa	Compatibilitate cu robinete		
					2111, 2002, 2311, 2312, 2314	2004, 2005	4493, 4496, 4497 reductor manual
	[mm]	[Nm]		[kg]	diameter		
9113-064	19	350	64	12	DN40-300	DN40-300	DN40-200
9113-090	27	500	90	14	DN350-700	DN350-500	DN250-450
9113-250	27	500	250	17	DN800-1200	DN600-1200	DN500-1200

No.	Reper	Executie standard
1	Corp	Otel inoxidabil 1.4301 EN 10088-1
2	Tija	Otel inoxidabil 1.4021 EN 10088-1
3	Element de centrare	PE 100 SDR 11
4	Indicator	Alama EN 1982
5	Element protectie	Otel inoxidabil 1.4301 EN 10088-1
6	Tija	Otel inoxidabil 1.4301 EN 10088-1

Descrierea produsului:

- Corp monolitic din otel inoxidabil
- Element de centrare al tije
- Tija din otel inoxidabil cu rulment cu dublu sens, atat vertical cat si orizontal
- Element de protectie al dispozitivului de blocare
- Indicator mecanic de pozitie

Domenii de utilizare:

Recomandat pentru actionarea de la suprafata a robinetelor montate ingropat sau in camine de mare adancime.

Conexiune cu robinetul:


- axiala – prin intermediul tije prelungitoare fixe
- not axiala - tija prelungitoare cu articulatie cardanica

Accesorii:

- Tija prelungitoare fixa: 9009; 9010
- Tija prelungitoare telescopica 9011
- Tija prelungitoare cu articulatie cardanica: 9116
- Roata de manevra: 9301
- Dispozitiv de blocare

Variante de executie:

- Senzori de inductie sau electromecanici
- Alte variante de executie la cerere.

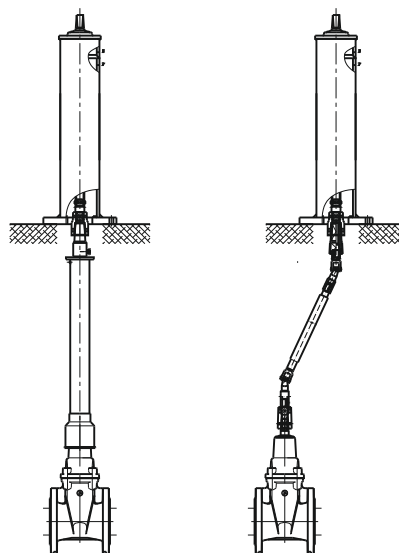Montaj:


Ne rezervam dreptul de a modifica caracteristicile produselor in functie de evolutia tehnica.