





**Roata de manevra**
**APA**
**CANALIZARE**
**GAZ**


Roata de manevra 200x17

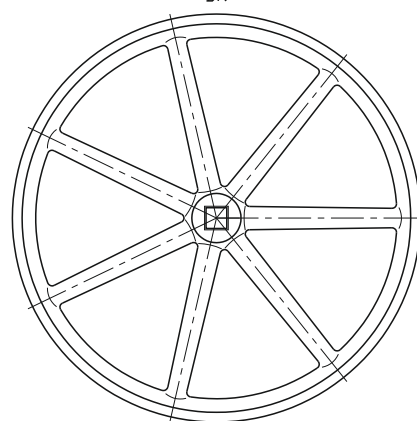

Dk 160-320



Dk 450-630



**Descrierea produsului (executie standard):**

- Din fonta cenusie EN-GJL-250 / Otel S235JR \*
- Surub si saiba incluse
- Acoperire epoxidica rezistenta UV, minim 250 microni conform EN 14091

**Domenii de utilizare:**

Actionarea manuala a robinetelor - montata direct pe tija robinetului

Dk	S	Masa	Dk	S/φ	Masa
[mm]		[kg]	[mm]		[kg]
160	12	0.9	450*	24	3.2
200	14	1.3	630*	24	3.8
200	17	1.6	630*	27	3.7
250	17	2.7	630*	32	3.6
250	19	2.7	630*	36	3.6
320	19	4.7	630*	φ30	3.8
320	24	4.7			
320	27	4.8			

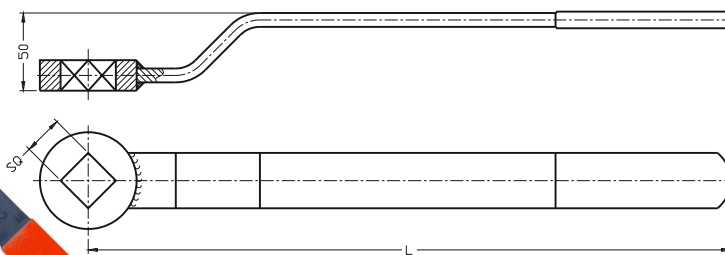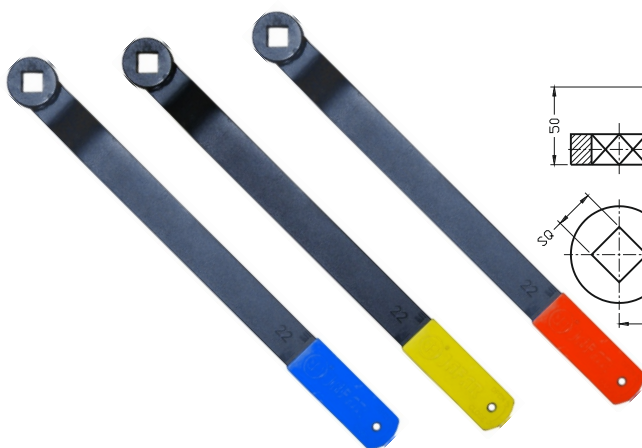**Levier**
**APA**
**CANALIZARE**
**GAZ**

**Descrierea produsului (executie standard):**

- Din otel protejat impotriva coroziunii
- Maner acoperit cu material plastic (polivinil)

**Domenii de utilizare:**

Actionarea manuala a robinetelor - montata direct pe tija robinetului

DN	SQ	L
32	11	180
40	11	180
50	17	250
65	17	250
80	22	360
100	22	360
125	22	500
150	27	600

Ne rezervam dreptul de a modifica caracteristicile produselor in functie de evolutia tehnica.